



Adapt11 Module

Mechanical Data and Pin Configuration

Dimensions in inches

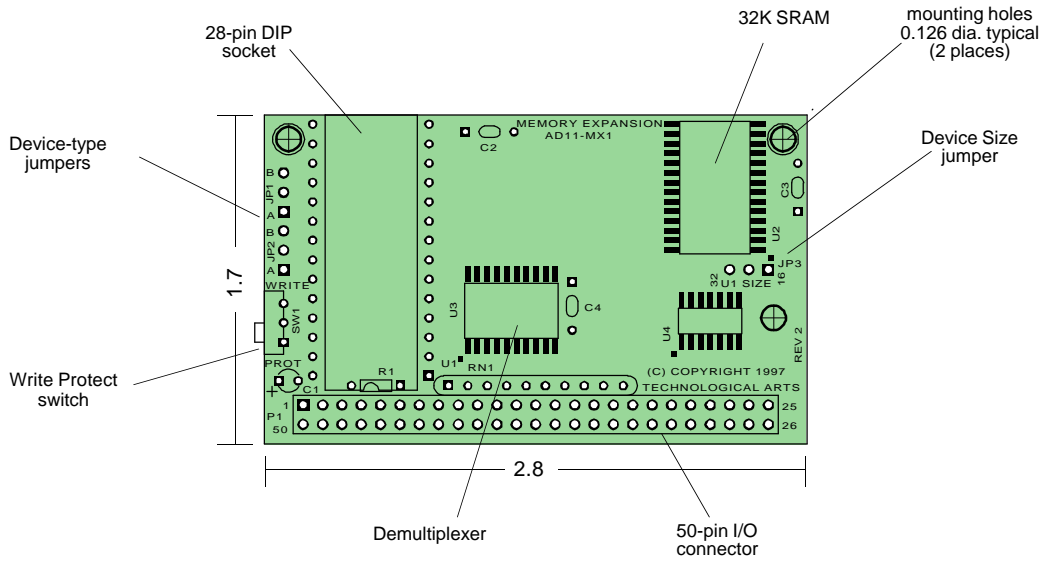

MEMORY MAP*

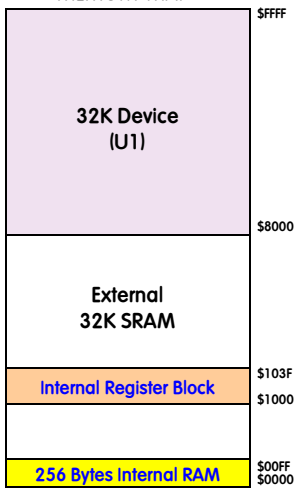

* with 68HC811E2FN MCU

Pin Assignments

PIN #	NAME	PIN #	NAME
1	NO CONNECTION	50	GROUND
2	NO CONNECTION	49	GROUND
3	NO CONNECTION	48	NO CONNECTION
4	NO CONNECTION	47	+5V
5	NO CONNECTION	46	NO CONNECTION
6	NO CONNECTION	45	NO CONNECTION
7	NO CONNECTION	44	NO CONNECTION
8	NO CONNECTION	43	NO CONNECTION
9	NO CONNECTION	42	ADDR7/DATA7
10	NO CONNECTION	41	ADDR6/DATA6
11	NO CONNECTION	40	ADDR5/DATA5
12	NO CONNECTION	39	ADDR4/DATA4
13	NO CONNECTION	38	ADDR3/DATA3
14	ADDR15	37	ADDR2/DATA2
15	ADDR14	36	ADDR1/DATA1
16	ADDR13	35	ADDR0/DATA0
17	ADDR12	34	R/W*
18	ADDR11	33	E
19	ADDR10	32	AS
20	ADDR9	31	NO CONNECTION
21	ADDR8	30	NO CONNECTION
22	NO CONNECTION	29	NO CONNECTION
23	NO CONNECTION	28	NO CONNECTION
24	NO CONNECTION	27	NO CONNECTION
25	NO CONNECTION	26	NO CONNECTION



Order Codes:

with 32K RAM ONLY: AD11MX1-□
32K RAM + 32K EEPROM: AD11MX1E-□

Standard Connector Options

